




Outstanding oxygen and moisture barrier performance.
Perfect stiffness.
Suitable for **retort***
Available with matte or paper touch lacquer in register.
Available in matte or glossy effect.
Adjustable thicknesses available.

* To be tested in exact retort conditions



End application:
Pet Food & Ready Meals

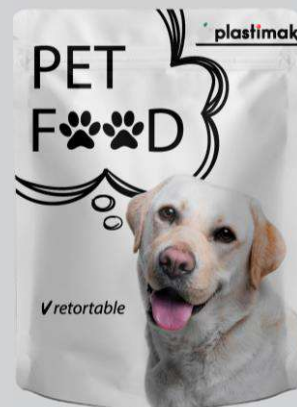

| | | |
|-----------------------------------|----------------|-------------|
| H_2O (38°C, 90%RH, ASTM F 1249) | $g/m^2/24h$ | 0.01 |
| O_2 (23°C, 0%RH, ASTM D 3985) | $cm^3/m^2/24h$ | 0.01 |

